

PAPER DETAILS

TITLE: Investigation of Domestic Wastewater Treatment and Electricity Generation Using A Two Chambered Microbial Fuel Cell with Composite Anode Electrode

AUTHORS: Gizem Hazan AKÇAY,Irfan AR

PAGES: 177-185

ORIGINAL PDF URL: <https://dergipark.org.tr/tr/download/article-file/2096383>

Investigation of Domestic Wastewater Treatment and Electricity Generation Using A Two Chambered Microbial Fuel Cell with Composite Anode Electrode

Gizem Hazan AKÇAY^{1*}, İrfan AR²

¹Muş Alparslan University, Faculty of Engineering and Architect, Department of Mechanical Engineering, Muş/Turkey.

²Gazi University, Faculty of Engineering and Architect, Department of Chemical Engineering, Ankara/Turkey.

Corresponding Author E-mail: g.hazan.caglayan@gmail.com*

ORCID ID: <http://orcid.org/0000-0002-5885-7934>

irfanar@gazi.edu.tr

ORCID ID: <http://orcid.org/0000-0002-6473-9205>

Geliş Tarihi: 23.11.2021

Kabul Tarihi: 25.01. 2023

Abstract

Microbial fuel cell is a bioelectrochemical system that generate electricity with the oxidation of organic substrates by exoelectrogenic microorganisms. It can be said that the studies on microbial fuel cells (MFCs) are generally aimed to increase the amount of energy produced. In this study, domestic wastewater treatment was investigated by using a two-chamber microbial fuel cell. Ankara Tatlar Wastewater Treatment Plant influent water was used as substrate. In order to reduce the diffusional resistance by reducing the distance between the anode and cathode electrode, the cathode chamber was placed in the middle of the anode chamber. Anode and cathode chambers separated by Nafion 117 membrane. In addition, an anode consisting of a stainless-steel mesh and a graphite supported catalyst has been developed to increase the electricity generation potential. During the experiment, the maximum voltage and the maximum power density values were obtained as 595 mV and 205.867 mW/m² respectively. COD value is a criteria which indicates the waste treatment ability of the systems. For this experiment COD values of the wastewater were measured both the beginning and the end of the experiment as 451 mg/L O₂ and 361 mg/L O₂. These results proved that the developed electrode structure is at a comparable level with the values reported in the literature for two-chamber MFC studies.

Keywords

Microbial Fuel Cell;
Composite Electrode;
Domestic Wastewater
Treatment;
Electricity Generation

© Afyon Kocatepe Üniversitesi

Kompozit Anot Elektrotlu İki Bölmeli Mikrobiyal Yakıt Pili Kullanılarak Evsel Atıksu Arıtımı ve Elektrik Üretiminin Araştırılması

Öz

Mikrobiyal yakıt hücresi, ekzoelektrojenik mikroorganizmalar tarafından organik substratların oksidasyonu ile elektrik üreten bir biyoelektrokimyasal sistemdir. Mikrobiyal yakıt pilleri (MYH) üzerine yapılan çalışmaların genel olarak üretilen enerji miktarını artırmaya yönelik olduğu söylenebilir. Bu çalışmada, iki bölmeli bir mikrobiyal yakıt hücresi kullanılarak evsel atıksu arıtımı araştırılmıştır. Substrat olarak Ankara Tatlar Atıksu Arıtma Tesisi giriş suyu kullanılmıştır. Anot ve katot elektrotu arasındaki mesafeyi azaltarak difüzyon direncini düşürmek için katot bölgesi anot bölgesinin ortasına yerleştirilmiştir ve bu bölmeler Nafion 117 membranı ile ayrılmıştır. Ayrıca elektrik üretim potansiyelini artırmak için paslanmaz çelik kafes ve grafit destekli bir anot elektrodu geliştirilmiştir. Deney sırasında maksimum voltaj 595 mV ve maksimum güç yoğunluğu değerleri 205.867 mW/m² olarak elde edilmiştir. KOİ değeri, sistemlerin atıksu arıtma kabiliyetini gösteren bir kriterdir. Bu deney için atıksuların KOİ değerleri deney başlangıcında ve sonunda 451 mg/L O₂ ve 361 mg/L O₂ olarak ölçülmüştür. Bu sonuçlar, geliştirilen elektrot yapısının iki bölmeli MYH çalışmaları için literatürde bildirilen değerlerle karşılaştırılabilir düzeyde olduğunu kanıtlamıştır.

Anahtar Kelimeler

Mikrobiyal yakıt
hücresi;
Kompozit elektrot;
Evsel atıksu arıtımı;
Elektrik üretimi

1. Introduction

The increasing energy demand and depletion of fossil fuels can cause a global energy crisis that will

affect both environmental quality and human health (Palanisamy *et al.* 2019). These problems have led to the search for alternative renewable energy sources (Priya and Setty 2019). Studies on alternative renewable energy sources are increasing day by day

in the fields of tidal, solar, geothermal, biomass and wind power generation (Slate *et al.* 2019). The biofuel cell technologies are known as both renewable and eco-friendly technology, aiming to be applied as a power source for fuel cell application (Nasar and Perveen 2019) These cells convert fuel

into electrical energy through electrocatalysts performing separated electrode reactions. Biofuel cells use either cells, enzymes, microorganisms or organelles as biocatalysts to accelerate anodic fuel

oxidation and cathodic oxidant reduction (Scheiblbrandner *et al.* 2022). Biofuel cells tend to operate under mild conditions (20–40°C, near-neutral pH). These properties make biofuel cells an attractive development prospect for use in applications where generating high temperatures is difficult, or where harsh reaction conditions are undesirable (Bullen *et al.* 2006). The energy production levels of electrochemical sources such as biofuel are shown in Figure 1.

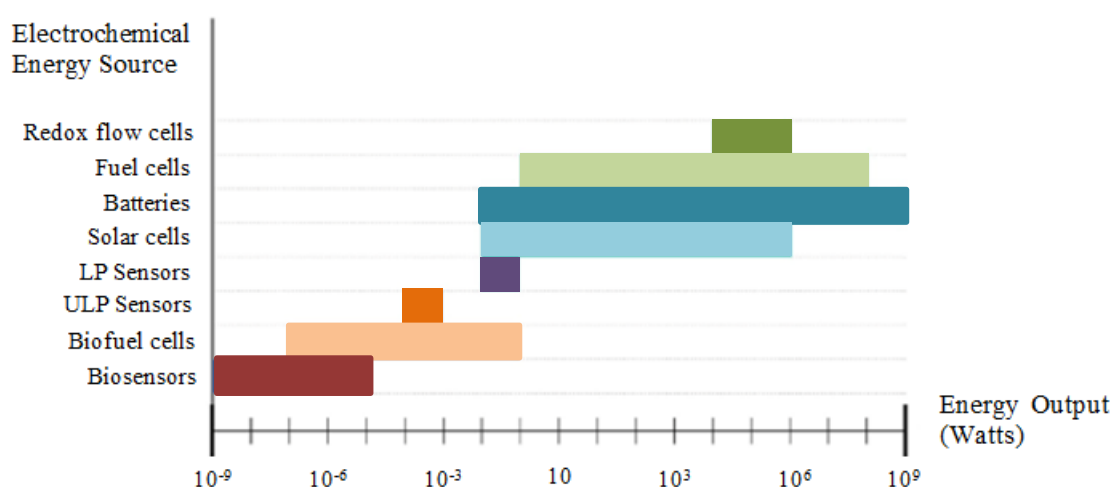


Figure 1. Energy production levels of electrochemical sources (Serra *et al.* 2020).

It is stated in Figure 1 that the energy production levels of fuel cells are an effective level among many types of cells and sensors. Generally, fuel cells are defined as electrochemical devices capable of converting a substrate into electrical energy (Ramesh *et al.* 2021). Besides that, the microbial fuel cell is accepted as a green technology for both biological treatment of pollutant and energy recycling (Tacas *et al.* 2021) that can convert organic materials into electrical energy and provide electrochemical wastewater treatment (Zhao *et al.* 2021). MFC is made up of anode and cathode chamber. It is generally divided by a semi-impermeable membrane (Bagchi and Behera 2021). In the anode chamber, electroactive microorganisms break down the substrates in an anaerobic environment and release electrons in the substrates. These electrons are transferred to the anode electrode via either a direct electron transfer mechanism or mediated electron transfer

mechanism (Arkatar *et al.* 2021). Electrons are transferred to the anode electrode by these mechanisms. Afterwards, these electrons are transferred to the cathode electrode by passing through an external circuit (Aiyer 2021) and energy generation occurs when this process complete (Arkatar *et al.* 2020).

The applications and architectural structures of MFC have changed over the time (Gustave *et al.* 2021). Various examples of these structures can be given: Plant-MFC (Helder *et al.* 2010), benthic MFC (Karra *et al.* 2013), PEM MFC (Chakraborty *et al.* 2020) and soil MFC (Casula *et al.* 2021). In recent years, MFC technology has been successfully improved with different types of organic substrates such as farming (Ma *et al.* 2016), refinery (Srikanth *et al.* 2016), municipal wastewater (Liang *et al.* 2018) and dairy wastewater (Choudhury *et al.* 2021).

Table 1. A view of the performance of MFCs with different substrates.

| Substrate | MFC Configuration | Anode | Power Density | Reference |
|------------------------------------|-----------------------------------|-----------------------------------|-------------------------------------|-------------------------------|
| Dairy wastewater | Annular single chamber MFC | The Ss mesh with graphite coating | 20.2 W/m ³ | Mardanpour <i>et al.</i> 2012 |
| Dairy wastewater | Dual chamber MFC | Graphite plates | 2.7 W/m ³ | Elakkiya and Matheswaran 2013 |
| Synthetic | Single chamber MFC | Titanium | 57 μ W·m ⁻² | Zhou <i>et al.</i> 2016 |
| Food factory wastewater | Single chamber MFC | Karbon örtü | 1007 mWm ⁻³ | Mohamed <i>et al.</i> 2016 |
| Textile wastewater | Single chamber MFC | Carbon fibres | 123.2 \pm 27.5 mW m ⁻³ | Logroño <i>et al.</i> 2017 |
| Domestic wastewater | Algal biofilm-assisted MFC | Carbon cloth | 62.93 mW·m ⁻² | Yang <i>et al.</i> 2018 |
| Nitrobenzene synthetic wastewater | MFC coupled constructed wetland | Graphite | 1.53 mW/m ² | Xie <i>et al.</i> 2018 |
| Activated sludge | Dual chamber air cathode MFC | Copper braid | 75.64 W/m ³ | Hayder and Dinçer 2019 |
| Synthetic | Dual chamber MFC | Graphite fibre brush | 3006 mW/m ³ | Ali <i>et al.</i> 2019 |
| Anaerobic sludge | MFC-Constructed wetlands reactors | Granular active carbon | 0.27 W m ⁻³ | Zhang <i>et al.</i> 2020 |
| Sulfate-laden wastewater. | Dual chamber MFC | Graphite sheets | 1188 mW/m ³ | Kumar <i>et al.</i> 2020 |
| Synthetic | Photosynthetic MFC | Graphite felt | 15.21 W m ⁻³ | Sharma and Chhabra 2021 |
| Dairy wastewater | Single chamber MFC | Pt/C cloth | 50 mW/m ² | Choudhury <i>et al.</i> 2021 |
| Electroplating industry wastewater | Dual chamber anaerobic MFC | Carbon veil | 260 mW/m ² | Karuppiah <i>et al.</i> 2021 |

The parameters that affect MFC performance are; fuel cell architecture, electrode materials, distance between electrodes, membrane or non-membrane systems, microorganisms, substrates and electron transfer mechanisms (Mohan *et al.* 2014). In full-scale applications, parameters such as modifications of MFCs and anode and cathode materials greatly affect the efficiency (Munoz-Cupa *et al.* 2021).

In this study carried out under the light of the above information both electricity generation and domestic wastewater treatment were investigated in a two chambered MFC design. The cathode chamber was placed inside the anode chamber. Thus, more electron flow was aimed at decreasing the intracellular diffusion resistance. Because it is aimed to increase the electric potential by more collection of electrons; metal and carbon materials

were used together for composite anode electrode design.

2. Material and Method

2.1. Reactor Configurations

In the study, a two chambered MFC was designed from plastic material. The anode chamber was rectangular and 2.5 L. The cathode chamber was circular and 200 mL. The cathode chamber was placed in the middle of the anode chamber and the anode and cathode chamber were physically separated by the Nafion 117 membrane (Ion Power Company, 720 Governor Lea Rd, New Castle, DE 19720). Before starting the experiment, the Nafion 117 membrane used in the reactor was activated by membrane conditioning and cut into 1 cm x 4 cm size and impedance analysis was performed.

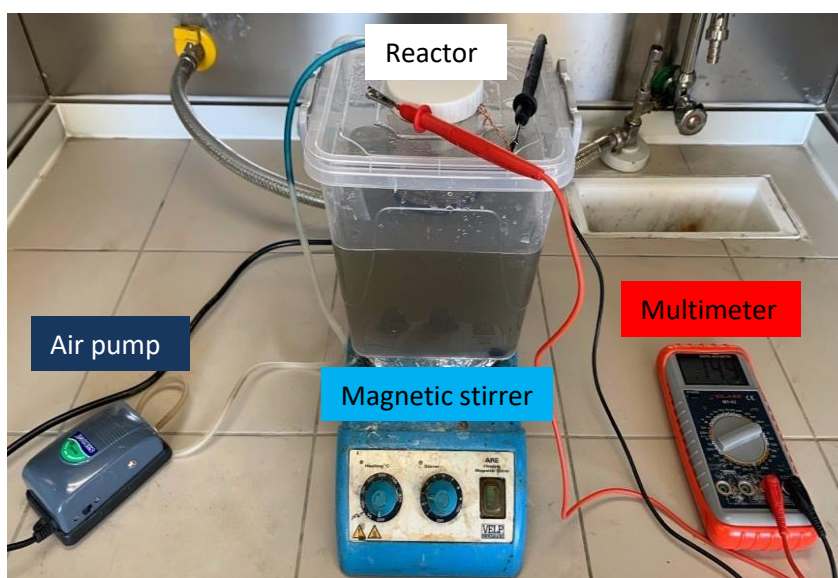


Figure 2. The experimental setup.

The reactor and experimental setup used in the study are shown in Figure 2. Ankara Tatlar Wastewater Treatment Plant influent water (2 liters) was used as a substrate in the anode chamber. The anode chamber was completely closed and maintained at anaerobic conditions.

The carbon rod is used as cathode electrode. The cathode chamber was filled with deionized water and vented with an air pump during the experiment. The reactor was stirred at the lowest speed during the operating period to ensure a homogeneous content.

2.2. Anode Electrode Design and Modification

Stainless steel (SS) mesh and graphite powder were used as anode electrode material. Stainless steel mesh was used as the current collector. This mesh properties can be expressed that 1.11 mS/m conductivity, plain weave, 40 mesh. Graphite powder (104206, Merck) properties can be expressed that 12.01 g/mol molar mass, 2.2136 g/cm³ (25 °C) density, 5-6 (50 g/l, H₂O, 20 °C) (slurry) pH value and ≥ 99.5 % particle size (<50 μm). Ethyl cellulose, terpineol and cyclohexanone binders were applied to half of the SS mesh. Then, graphite powder was poured on both surfaces of the mesh and the prepared electrode was left to dry for two days. The designed anode electrode is shown in Figure 3.



Figure 3. Stainless steel mesh + graphite electrode.

2.3. Electrochemical Analysis and COD Analysis

The current and voltage values were measured manually by a digital multimeter (Class MY-62) at 15 minutes intervals. The power density values are calculated using Equation (1).

$$P = I \cdot V / A \quad (1)$$

where, P: Power Density W/m², I: Current, amper, V: Voltage, volt, A: Anode electrode area, m² (Aktan *et al.* 2011).

Impedance analysis of the membrane was performed by using combined Solartron 1260-

Solartron 1287 device, which has the ability to measure in the range of 1 Hz-1000 MHz.

Matriks MD-600 test kits were used for COD analysis of domestic wastewater used in the reactor. Before the reactor was put into operation, an initial COD analysis was performed by taking 2 mL sample from the wastewater. At the end of the experiment, 2 mL sample was taken again from the anode chamber and the COD analysis was repeated.

3. Results and Discussion

Impedance analysis was performed to determine whether the conditioned Nafion 117 membrane had sufficient ionic conductivity before the operation. The result of the impedance test is given in Figure 4.

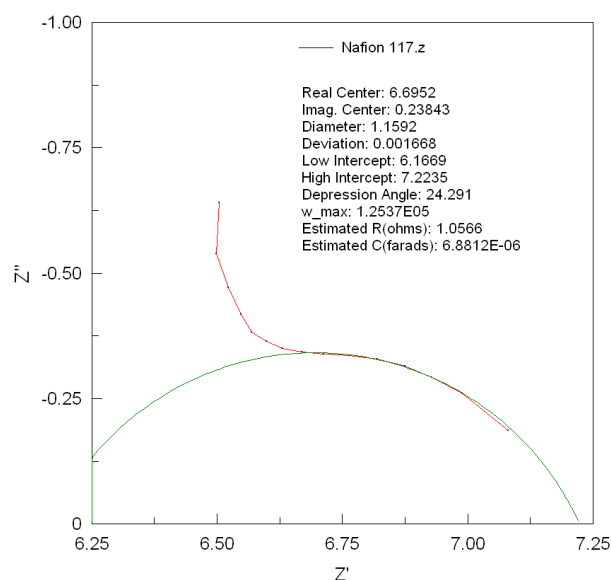


Figure 4. Nafion 117 impedance analysis graph.

When the impedance analysis graph is examined, it can be said that the activated membrane is conditioned (Rohm: 1.0566) and ready for use in the MFC. After all processes are completed, the MFC was operated for 7th day and the study was finished at the end of the 7th day since no current/voltage values were measured. During the experiment, voltage measurements were made only between 10:00 and 17:00 (every 15 min).

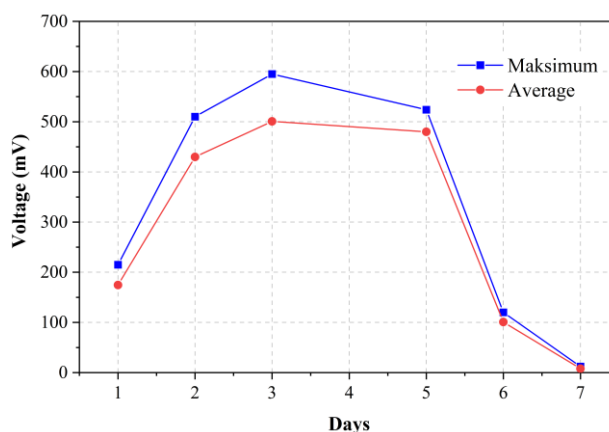


Figure 5. Voltage values graph.

Figure 5 shows that the substrate consumption increased with the adaptation of exoelectrogenic microorganisms to the environment and it was observed that the voltage values increased significantly on the 2nd day. This situation shows that an electrochemical biofilm structure occurred on the anode electrode. Electricity generation was observed several hours after the reactor was started and the maximum voltage value was reached on the 3rd day as 595 mV. Since the nutrient decreases in the wastewater, the voltage values started to decrease fluctuating after the 3rd day. At the end of the 7th day, the experiment was finished since no values were observed. The cathode chamber was placed in the middle of the anode chamber, reducing the distance between electrodes. The relatively small distance between the anode and cathode electrode is effective in the amount of electricity obtained in the study.

In the literature, Chandhuri and Lovley (2003) used graphite felt as the anode electrode and glucose as the substrate in their study. During the study, the maximum voltage was measured as 620 mV [25]. Wu *et al.* (2017), measured about 460 mV as the maximum voltage using combined small graphite fiber brush and carbon mesh as anode and municipal wastewater as substrate, in their study [26]. Nguyen and Min (2020) used carbon fiber brush as anode electrode, leachate wastewater as a substrate in their study and maximum voltage value was measured as 330 mV. Yu *et al.* (2021) investigated electricity generation with a graphite felt anode electrode in an SMFC using petroleum

hydrocarbon contaminated soils as a substrate. The stable voltage 345 mV was measured [27]. When the literature studies were examined, it was seen that the maximum voltage value is quite high compared to other studies. Additionally, this value shows that the new composite electrode makes an important contribution to electricity generation. The mesh structure of the anode electrode increased the biofilm rate and provided high voltage. The power density was calculated by using current values and voltage values in Eq (1) and given in Figure 6.

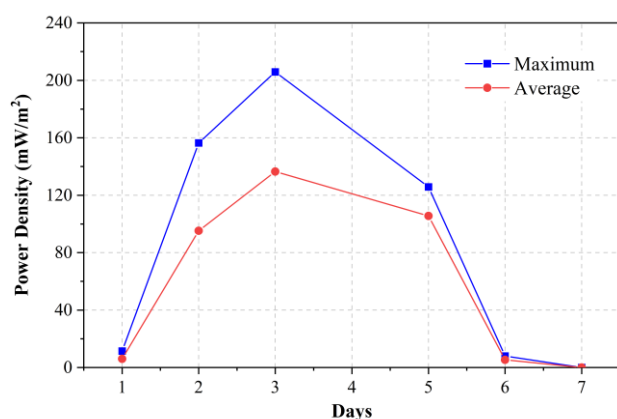


Figure 6. Power density values graph.

Decreasing the distance among the anode and cathode electrode was also effective in reducing the intracellular resistance. In this experiment, the increase in electricity generation continued until the end of the 3rd day and the maximum power density was reached on this day. Figure 6 shows that the maximum power density was calculated as 205.867 mW/m². High results were obtained by the current reactor design. Exoelectrogens transferred electrons from composite electrodes through some mechanisms and provided high power density. Rahimnejad *et al.* (2011) used graphite plates as anode electrode and glucose as a substrate. During the study, its maximum power density was calculated as 283 mW/m². Lakshmidevi *et al.* (2020) used as a substrate municipal solid waste landfill leachate and graphite as anode electrode and maximum power density was calculated as 95.63 mW/m². Various studies on power density have also been mentioned in Table 1. It is seen that the maximum power density value is comparable with

literature. Finally, COD values were calculated at the begin/end of the experiment were measured as 451 mg/L O₂ and 361 mg/L O₂, respectively.

4. Conclusions

In this paper, electricity generation and domestic wastewater treatment performance were investigated using a two-chambered microbial fuel cell. Domestic wastewater was used as substrate in the reactor. A composite anode electrode was used which was designed by using graphite powder and SS mesh. The maximum voltage and power density were measured as 595 mV and 205.867 mW/m², respectively. The voltage and power density values are comparable with the literature. It can be said that the stainless steel mesh and graphite powder composite electrode will be an alternative anode electrode to other electrode types in the literature. Besides that the domestic wastewater causes serious environmental pollution and needs to be treated to a certain extent for discharge to surface waters. MFC can be also helpful for this problem. Improvements on the reactor configurations and electrodes can increase the efficiency of the MFC including electricity generation and wastewater treatment ability.

5. References

- Aiyer, K.S., 2021. Synergistic effects in a microbial fuel cell between co-cultures and a photosynthetic alga *Chlorella vulgaris* improve performance. *Heliyon*, **7(1)**, e05935.
- Aktan, S., Ubay Çokgör, E. and Gücin, F., 2011. Electricity generation from organic substrates by a microbial fuel cell using *Shewanella putrefaciens*. *ITU Journal Series E: Water Pollution Control*, **21(2)**, 79-87.
- Ali, J., Wang, L., Waseem, H., Sharif, H.M.A., Djellabi, R., Zhang, C. and Pan, G., 2019. Bioelectrochemical recovery of silver from wastewater with sustainable power generation and its reuse for biofouling mitigation. *Journal of Cleaner Production*, 235.
- Arkatkar, A., Mungray, A.K. and Sharma, P., 2020. Bioelectrochemical behaviour of a sequentially added

- biocatalytic coculture in a microbial fuel cell. *Journal of Basic Microbiology*, **60(7)**, 562-573.
- Arkatkar, A., Mungray, A.K. and Sharma, P., 2021. Study of electrochemical activity zone of *Pseudomonas aeruginosa* in microbial fuel cell. *Process Biochemistry*, **101**, 213-217.
- Arun, S., Sinharoy, A., Pakshirajan, K. and Lens, P.N., 2020. Algae based microbial fuel cells for wastewater treatment and recovery of value-added products. *Renewable and Sustainable Energy Reviews*, **132**, 110041.
- Bagchi, S. and Behera, M., 2021. Evaluation of the effect of anolyte recirculation and anolyte pH on the performance of a microbial fuel cell employing ceramic separator. *Process Biochemistry*, **102**, 207-212.
- Bullen, R. A., Arnot, T.C., Lakeman, J.B. and Walsh, F.C., 2006. Biofuel cells and their development. *Biosensors and Bioelectronics*, **21(11)**, 2015-2045.
- Casula, E., Kim, B., Chesson, H., Di Lorenzo, M. and Mascia, M., 2021. Modelling the influence of soil properties on performance and bioremediation ability of a pile of soil microbial fuel cells. *Electrochimica Acta*, **368**, 137568.
- Chakraborty, I., Das, S., Dubey, B.K. and Ghangrekar, M.M., 2020. Novel low cost proton exchange membrane made from sulphonated biochar for application in microbial fuel cells. *Materials Chemistry and Physics*, **239**, 122025.
- Chaudhuri, S.K. and Lovley, D.R., 2003. Electricity generation by direct oxidation of glucose in mediatorless microbial fuel cells. *Nature Biotechnology*, **21(10)**, 1229-1232.
- Chen, S., Jing, X., Tang, J., Fang, Y. and Zhou, S., 2017. Quorum sensing signals enhance the electrochemical activity and energy recovery of mixed-culture electroactive biofilms. *Biosensors and Bioelectronics*, **97**, 369-376.
- Choudhury, P., Ray, R.N., Bandyopadhyay, T.K., Basak, B., Muthuraj, M. and Bhunia, B., 2021. Process engineering for stable power recovery from dairy wastewater using microbial fuel cell. *International Journal of Hydrogen Energy*, **46(4)**, 3171-3182.
- Elakkiya, E. and Matheswaran, M., 2013. Comparison of anodic metabolisms in bioelectricity production during treatment of dairy wastewater in microbial fuel cell. *Bioresource technology*, **136**, 407-412.
- Erable, B., Byrne, N., Etcheverry, L., Achouak, W. and Bergel, A., 2017. Single medium microbial fuel cell: stainless steel and graphite electrode materials select bacterial communities resulting in opposite electrocatalytic activities. *International Journal of Hydrogen Energy*, **42(41)**, 26059-26067.
- Gustave, W., Yuan, Z., Liu, F. and Chen, Z., 2021. Mechanisms and challenges of microbial fuel cells for soil heavy metal (loid)s remediation", *Science of The Total Environment*, **756**, 143865.
- Hayder, M.A.H. and Dincer, K., 2019. Experimental investigation of 11x11 cm² membrane microbial fuel cell performance. *Materials Today: Proceedings*, **18**, 1903-1909.
- Helder, M., Strik, D., Hamelers, H., Kuhn, A., Blok, C. and Buisman, C., 2010. Concurrent bio-electricity and biomass production in three plant-microbial fuel cells using *spartina anglica*, *arundinella anomala* and *arundo donax*. *Bioresource Technology*, **101(10)**, 3541-3547.
- Karra, U., Huang, G., Umaz, R., Tenaglier, C., Wang, L. and Li, B., 2013. Stability characterization and modeling of robust distributed benthic microbial fuel cell (DBMFC) system. *Bioresource Technology*, **144**, 477-484.
- Karuppiah, T., Uthirakrishnan, U., Sivakumar, S. V., Authilingam, S., Arun, J., Sivaramakrishnan, R. and Pugazhendhi, A., 2021. Processing of electroplating industry wastewater through dual chambered microbial fuel cells (MFC) for simultaneous treatment of wastewater and green fuel production. *International Journal of Hydrogen Energy*.
- Kumar, S. S., Kumar, V., Gude, V. G., Malyan, S. K. and Pugazhendhi, A., 2020. Alkalinity and salinity favor bioelectricity generation potential of *Clostridium*, *Tetrathlobacter* and *Desulfovibrio* consortium in microbial fuel cells (MFC) treating sulfate-laden wastewater. *Bioresource technology*, **306**, 123110.

- Lakshmidēvi, R., Gandhi, N.N. and Muthukumar, K., 2020. Carbon neutral electricity production from municipal solid waste landfill leachate using algal-assisted microbial fuel cell. *Applied Biochemistry and Biotechnology*, **191**, 852-866.
- Li, J., Liu, C., Liao, Q., Zhu, X. and Ye, D., 2013. Improved performance of a tubular microbial fuel cell with a composite anode of graphite fiber brush and graphite granules. *International Journal of Hydrogen Energy*, **38(35)**, 15723-15729.
- Liang, P., Duan, R., Jiang, Y., Zhang, X., Qiu, Y. and Huang, X., 2018. One-year operation of 1000-L modularized microbial fuel cell for municipal wastewater treatment. *Water Research*, **141**, 1-8.
- Lim, C. Y-X, Leong, H.M, Chandra, A.D. Phua, W., 2021. Exploring the use of apple skin to boost the energy efficiency of microbial fuel cells. *IRC-SET 2020 Springer, Singapore*, 317-326.
- Ma, J., Ni, H., Su, D. and Meng, X., 2016. Bioelectricity generation from pig farm wastewater in microbial fuel cell using carbon brush as electrode. *International Journal of Hydrogen Energy*, **41(36)**, 16191-16195.
- Mardanpour, M. M., Esfahany, M. N., Behzad, T. and Sedaqatvand, R., 2012. Single chamber microbial fuel cell with spiral anode for dairy wastewater treatment. *Biosensors and Bioelectronics*, **38(1)**, 264-269.
- Mohamed, H. O., Obaid, M., Khalil, K. A. and Barakat, N. A., 2016. Power generation from unconditioned industrial wastewaters using commercial membranes-based microbial fuel cells. *International Journal of Hydrogen Energy*, **41(7)**, 4251-4263.
- Mohan, S.V., Velvizhi, G., Krishna, K.V. and Babu, M.L., 2014. Microbial catalyzed electrochemical systems: a bio-factory with multi-facet applications. *Bioresource Technology*, **165**, 355-364.
- Munoz-Cupa, C., Hu, Y., Xu, C.C. and Bassi, A., 2021. An overview of microbial fuel cell usage in wastewater treatment, resource recovery and energy production. *Science of The Total Environment*, **754**: 142429.
- Nasar, A. and Perveen, R., 2019. Applications of enzymatic biofuel cells in bioelectronic devices—A review. *International Journal of Hydrogen Energy*, **44(29)**, 15287-15312.
- Nguyen, H. T. and Min, B., 2020. Leachate treatment and electricity generation using an algae-cathode microbial fuel cell with continuous flow through the chambers in series. *Science of the Total Environment*, **723**, 138054.
- Palanisamy, G., Jung, H.Y., Sadhasivam, T., Kurkuri, M.D., Kim, S.C. and Roh, S.H., 2019. A comprehensive review on microbial fuel cell technologies: Processes, utilization, and advanced developments in electrodes and membranes. *Journal of Cleaner Production*, **221**, 598-621.
- Priya, A.D. and Setty, Y.P., 2019. Cashew apple juice as substrate for microbial fuel cell. *Fuel*, **246**, 75-78.
- Rahimnejad, M., Ghoreyshi, A.A., Najafpour, G. and Jafary, T., 2011. Power generation from organic substrate in batch and continuous flow microbial fuel cell operations. *Applied Energy*, **88(11)**, 3999-4004.
- Ramesh, M., Balakrishnan, P., Dhanaprabhu, S. S., Ramanan, A. and Maniraj, J., 2021. Enzyme-modified electrodes for biofuel cells: A comprehensive review. *Materials Today: Proceedings*, **(46,9)**, 3495-3501.
- Scheiblbrandner, S., Csarman, F. and Ludwig, R., 2022. Cellobiose dehydrogenase in biofuel cells. *Current Opinion in Biotechnology*, **73**, 205-212.
- Serra, P. M. D., Espírito-Santo, A. and Magrinho, M., 2020. A steady-state electrical model of a microbial fuel cell through multiple-cycle polarization curves. *Renewable and Sustainable Energy Reviews*, **117**, 109439.
- Sharma, A. and Chhabra, M., 2021. Performance evaluation of a photosynthetic microbial fuel cell (PMFC) using *Chlamydomonas reinhardtii* at cathode. *Bioresource Technology*, **338**, 125499.
- Slate, A.J., Whitehead, K.A., Brownson, D.A. and Banks, C.E., 2019. Microbial fuel cells: An overview of current technology. *Renewable and Sustainable Energy Reviews*, **101**, 60-81.
- Srikanth, S., Kumar, M., Singh, D., Singh, M.P. and Das, B.P., 2016. Electro-biocatalytic treatment of petroleum refinery wastewater using microbial fuel cell (MFC) in continuous mode operation. *Bioresource Technology*, **221**, 70-77.

- Tacas, A.C.J., Tsai, P.W., Tayo, L.L., Hsueh, C.C., Sun, S.Y. and Chen, B.Y., 2021. Degradation and biotoxicity of azo dyes using indigenous bacteria-acclimated microbial fuel cells (MFCs). *Process Biochemistry*, **102**: 59-71.
- Wu, S., He, W., Yang, W., Ye, Y., Huang, X. and Logan, B.E., 2017. Combined carbon mesh and small graphite fiber brush anodes to enhance and stabilize power generation in microbial fuel cells treating domestic wastewater. *Journal of Power Sources*, **356**, 348-355.
- Xie, T., Jing, Z., Hu, J., Yuan, P., Liu, Y. and Cao, S., 2018. Degradation of nitrobenzene-containing wastewater by a microbial-fuel-cell-coupled constructed wetland. *Ecological Engineering*, **112**, 65-71.
- Yang, Z., Pei, H., Hou, Q., Jiang, L., Zhang, L. and Nie, C., 2018. Algal biofilm-assisted microbial fuel cell to enhance domestic wastewater treatment: nutrient, organics removal and bioenergy production. *Chemical Engineering Journal*, **332**, 277-285.
- Yu, B., Feng, L., He, Y., Yang, L. and Xun, Y., 2021. Effects of anode materials on the performance and anode microbial community of soil microbial fuel cell. *Journal of Hazardous Materials*, **401**, 123394.
- Zhang, K., Wu, X., Luo, H., Li, X., Chen, W., Chen, J., Mo, Y. and Wang, W., 2020. CH₄ control and associated microbial process from constructed wetland (CW) by microbial fuel cells (MFC). *Journal of environmental management*, **260**, 110071.
- Zhao, C., Wei, D., Fan, D., Meng, S., Bian, S., Zhang, X. and Wei, Q., 2021. Coupling of nitrifying granular sludge into microbial fuel cell system for wastewater treatment: system performance, electricity production and microbial community shift. *Bioresource Technology*, **326**, 124741.
- Zhou, X., Chen, X., Li, H., Xiong, J., Li, X. and Li, W., 2016. Surface oxygen-rich titanium as anode for high performance microbial fuel cell. *Electrochimica Acta*, **209**, 582-590.